


W2-CO-10X BATTERY POWERED WIRELESS CO ALARM

Sensor type	Advanced electrochemical
Battery type	10 year sealed for life lithium



- Advanced electrochemical sensor calibrated and tested in CO gas.
- 10 year sealed for life lithium battery.
- **Wi-Safe 2** technology - up to 50 **Wi-Safe 2** alarms can be interlinked on a single network.
- Large central button - test / silence / locate.
- Integrated flip down bracket.
- Single pin or 2 screw fitting options.
- Optional tamper resistant feature to prevent unauthorised removal.
- Sleep Easy - a low battery chirp can be silenced for 8 hours by pressing the test button, this can be used up to 10 times.

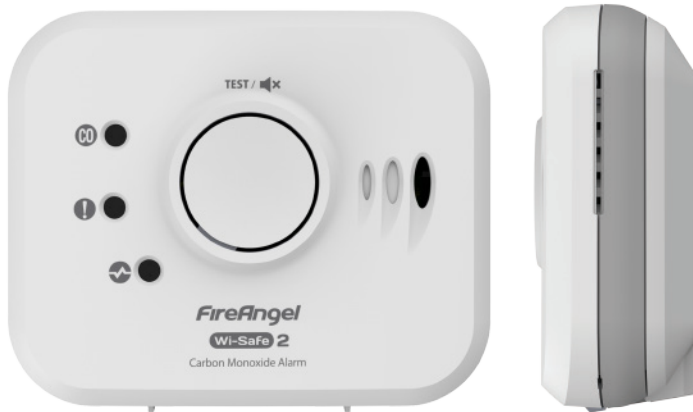

BS EN50291-1:2010
BS EN 50291-2:2010
Licence No: KM 551504



Technical Specification

Dimensions	114mm (width) x 94.5mm (height) x 40mm (depth)	
Supply voltage	3V DC	
Battery	10 year sealed for life lithium battery	
Technology	Advanced electrochemical and Wi-Safe 2	
Alarm sound level	85dB(A) at 3m (minimum)	
Installation positions	Wall / Free-standing	
Operating temperature	+4°C to +38°C	
Operating humidity	Up to 90% RH non-condensing	
Storage temperature	-20°C to +60°C	
Storage humidity	Up to 93% RH non-condensing	
Plastic material	ABS, UL94 VO fire retardant	
Warranty	5 years	
Master pack quantity	10	
Weight	190g	
Certified to	BS EN 50291-1 & 2: 2010	
Independently tested to	ETSI EN 300 220-2 V2.3.2 (2010-02), EN 300489-1 &-3, EN300220-2-Radio	
Maximum number of connected units	50 wireless units	
Operating Frequency	868 MHz	
Range	35m (over 200m in clear air)	